

ZGSM-QD160H

It's Time To Upgrade Your Recessed Luminaire

Brighter

250W HID Replacement



Dimming functions are supported by optional
+ Three in One (1-10V DC or PWM Signal or Resistance)
+ Timer - Contact ZGSM for Details

Specifications

Electrical Specifications:

Model No.	ZGSM-QD160H
Nominal Wattage	160W
Nominal Voltage	AC 100-240V /277V, 50/60Hz DC /
Maximum Current	AC 1.65A -120V, 0.82A -240V DC /
Optimal Operating Temperature	-40 °C to +50 °C
Power Factor (PF)	> 0.9
Driver Efficiency	> 90%





Photometric Specifications:

Lumen Output	15200 lm (+/- 5%)
Photometric Type	60° 90° 110°
CRI	Minimum 70 CRI
CCT	4000k 5000k 5700K

Mechanical Specifications:

Ratings	IP65, IK08
Lumen Maintenance	>60,000 hours -L70(9K), @25 °C (77 °F)
Heat Radiator	Anodized Aluminum
Lens	PC
Fixture Dimension	450 x316 x120 mm 17.7 x12.4 x4.7 inches
Fixture Weight	5.4 kg /11.9 lbs

Ceiling Thickness: 10 - 25 mm /0.4 - 1.0 inches
Hole Size: 421 ×285 mm /16.6 ×11.2 inches

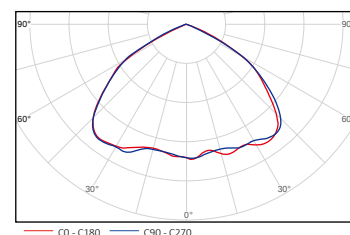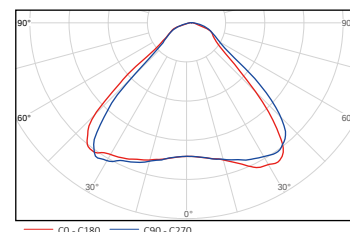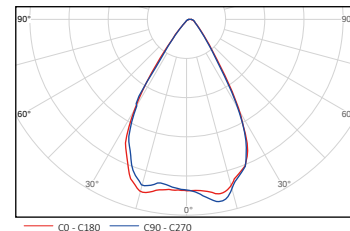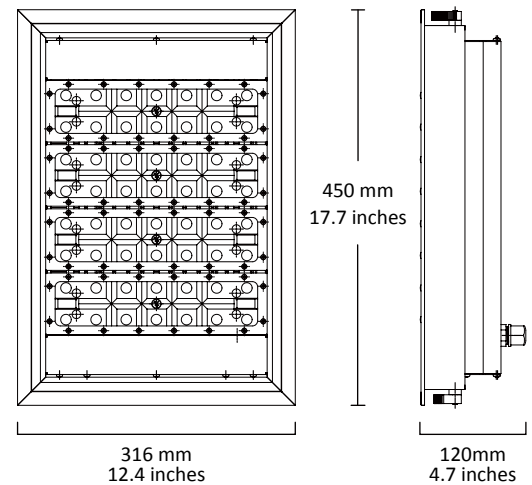

Packing Type

1unit(s) /ctn.

Packing Dimension

500 x365 x200 mm
19.7 x14.4 x7.9 inches

Packing Weight

6.3 kg /13.9 lbs



CE RoHS CB

www.zgsm-china.com

